


Art. 85L



TECHNICAL CHARACTERISTICS				
	85L-M		85L-G	
WEIGHT OF PART	1,2Kg		2,05Kg	
LOAD-BEARING CAPACITY (P) L/H=1	350 Kg (with bottom hinge 87L-M)		500 Kg (with bottom hinge 87L-G)	
DURATION 110% (P)	220.000 Cycles (with bottom hinge 87L-M)		230.000 Cycles (with bottom hinge 87L-G)	
MAINTENANCE FREQUENCY				
PRIVATE HOME	BUSINESS	WAREHOUSE	CONDOMINIUM <20 UNITS	CONDOMINIUM > 20 UNITS
1 YEAR *	1 YEAR *	1 YEAR *	6 MONTHS *	6 MONTHS *
Check hinge wear. Check tightening of upper screws.				
Check fixing of plugs. Check welds and horizontality of sash.				
*The scheme refers to a normal workplace (not marine or particularly aggressive environments).				

Art.		Code	A	B	C	D	H	I	L	N	R	S	Kg COFFIA	Kg	Kg
85L-M	Ø50	10801607 001	50	90	9	Ø25	62	45	100	Ø50	70-85	10	350	4	4,80
85L-G	Ø70	10801610 001	60	110	15	Ø35	72	55	130	Ø70	90-105	10	500	2	4,20

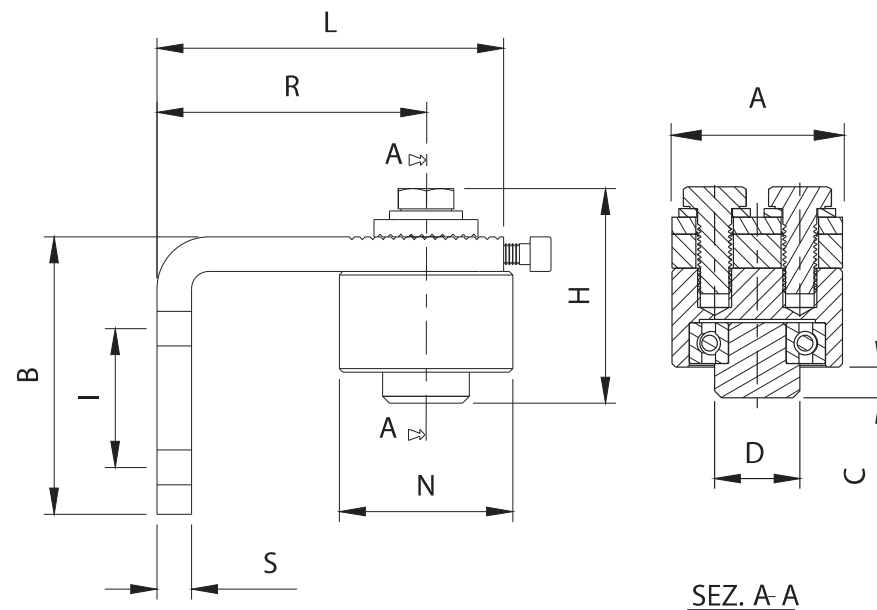